

## **AVANDA 218A**


The AVANDA 218A is an active subwoofer specifically designed for mobile applications, rental companies and fixed installations; wherever exceptional sound quality is needed.

It features two custom-designed 18-inch neodymium drivers with 4-inch voice coil.

The AVANDA 218A seamlessly complements Audiocenter's full-range loudspeakers, expanding the frequency response range. They deliver powerful, impactful low-end reinforcement.

With its modular design, the AVANDA 218A offers high flexibility, allowing a cardioid subwoofer pattern and large-scale speaker array configurations. It allows for suspension of up to 12 speakers, providing sound engineers with great convenience and flexibility for installation.



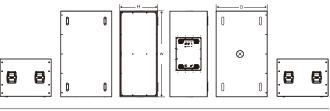

Dimension(W×H×D):1252×556×749mm

### **Key Features**

- Long Excursion
- High power handling
- Low distortion
- 3 presets
- High end DSP, with 96KHz signal sampling frequency
- Sleep mode automatically if without signal input for 45mins
- Class D amplifier
- Advanced cooling system in the driver
- Multilayer baltic birch plywood
- Durable polyurea coating
- Support hanging installation

















Net Weight

Shipping Weight




#### **SPECIFICATION** Active DSP-controlled subwoofer Type Frequency Response(-10dB) 27Hz-110Hz Maximum Calculated 138dB/144dB SPL/1M(Continuous/Peak) I F Driver Customized 2x18" Neodymium driver, 4.0"voice coil DSP Processor 96kHz signal sampling frequency Presets 80Hz,100Hz,Cardioid **AMPLIFIER Amplifier Circuitry** Class D Power(RMS standards) 4000\\ **Peak Power** 8000W Frequency Response 20Hz-20kHz(±1dB) (1W 8Ω 2ch) Intermodulation Distortion < 0.1% Total Harmonic Distortion < 0.1% Cooling Cooling with fans, air convection Protection DC protection, short circuit protection, overheat protection, input overload protection, output overload protection, soft startup protection, overvoltage protection, undervoltage protection Signal Input Female XLR Signal Output Male XLR Power Input Power connector AC Power Operating Range 100V-130V~ or 220V-240V~(±10%,50/60Hz) Power consumption 500W (1/8 output power) **CABINET** Cabinet Material Multilayer baltic birch plywood Coating **Durable Polyurea Coating** Cabinet Color Black is the default color. Contact Audiocenter for customization Grille Iron mesh Handles 4 side Pole Mount M20 base Φ35mm Speaker Dimension(WxHxD) 1252x556x749mm Carton Dimensions (WxHxD) 1348x655x845mm


99.0kg

107.0kg



# Frequency Response Graphs

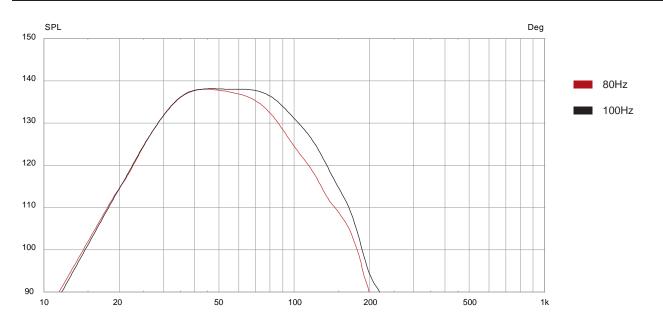

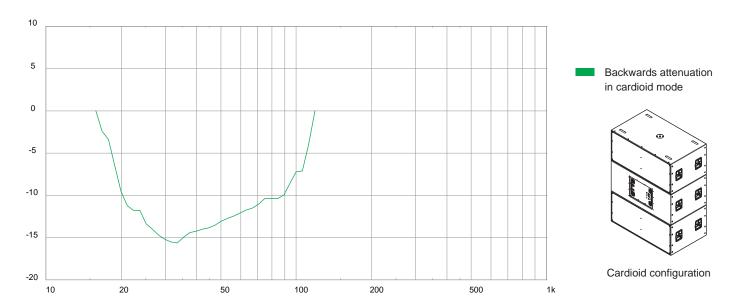



#### **Accessories**



AVANDA212A/210A flying and ground-stacking frame




AVANDA212A to 210A Coupling Frame



AVANDA212A extension bar



AVANDA212A/210A dolly + protective cover (for 4 cabinets)




AVANDA 212A/210A Flightcase For 2 cabinets, with 100mm wheels



AVANDA218A Flying frame set




AVANDA218A Hanging side-brackets kit



AVANDA 218A Flightcase
For 1 cabinet, with 100mm wheels



AVANDA 218A dolly + protective cover (for 3 cabinets)



Rain bag (customized)

## Installations





