
PRO-S5118A

The PRO-S5118A subwoofer comes with 3 presets (80Hz, 100Hz, Cardioid), allowing users to flexibly switch according to different usage scenarios and music styles.

With two XLR inputs, it supports single - channel signal input and output, making it easy to link multiple speakers for signal distribution.





Dimension(W×H×D):700×556×655mm

FEATURES

- High end DSP, with 48KHz signal sampling frequency
- Sleep mode automatically if without signal input for 45mins
- Class D amplifier
- Universal Power Source and PFC Technology
- Advanced cooling system in the driver
- CNC made of excellent wood
- Durable polyurea coating
- Support hanging installation











Maximum Calculated 129dB/1 SPL/1M(Continuous/Peak) Customi LF Driver Customi DSP Processor Processor 48kHz s Presets 80Hz,10 AMPLIFIER Amplifier Circuitry Power(RMS standards) 1500W Peak Power 3000W

Frequency Response (1W 8Ω 2ch) Intermodulation Distortion Total Harmonic Distortion Cooling Protection

SPECIFICATION

Frequency Response(-10dB)

Signal Input Signal Output Power Input AC Power Operating Range Power consumption (1/8 output power) CABINET Cabinet Material Coating

Cabinet Color

Grille Handles Pole Mount Speaker Dimension(W×H×D) Carton Dimensions (W×H×D) Net Weight Shipping Weight 30Hz-130Hz 129dB/135dB

Customized 1x18" driver, 4.0" voice coil

48kHz signal sampling frequency 80Hz,100Hz,Cardioid


Class D 1500W 3000W 20Hz-20kHz(±0.5dB)

<0.05% <0.05% Cooling with fans,air convection DC protection, short circuit protection, overheat protection, input overload protection, output overload protection, soft startup protection, overvoltage protection, undervoltage protection Female XLR Male XLR Power connector 100V-240V~(±10%,50/60Hz) 149W

CNC made of excellent wood Durable Polyurea Coating Black is the default color. Contact Audiocenter for customization Iron mesh 2 side M20 base Ф35mm 700×556×655mm 786×675×741mm 48.0kg 52.0kg



Accessories

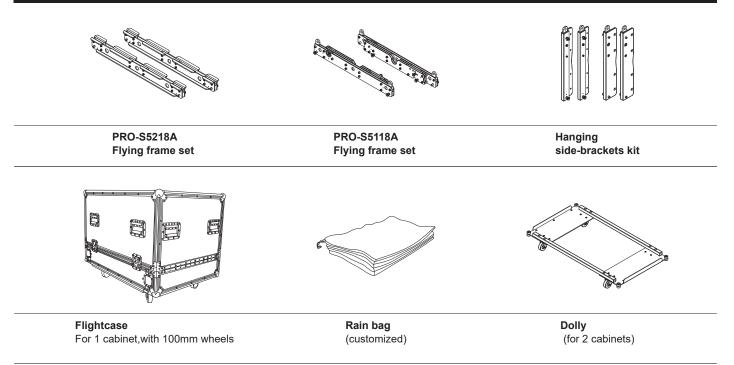

Installations

