
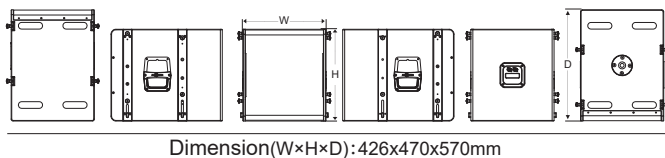


DSL115S

DSL115S is single 15" flyable passive subwoofer. It's suitable for multi-functional hall, ball room, house of worship, commercial space, etc.

DSL115S uses customized 15" LF drivers with 4" voice coil. Optimized phase structure makes DSL115S with extremely high SPL and supreme sound quality and performance.

With tongue and groove CNC made cabinet with excellent wood, DSL115S is resonance free.




Dimension(W×H×D):426x470x570mm


FEATURES

- Waterproof Rating IP54
- Maximum SPL 127dB
- Customized driver
- The innovative ETE™ waveguide technology can ensure excellent frequency response, to achieve very smooth transitions between HF and LF, which provides precise horizontal coverage and ensures clear and balanced sound for the system.
- Optimized, compact and light weight cabinet design for easy usage
- Durable Polyurea Coating
- Comprehensive accessories for different applications


ACCESSORIES



- FF-DSL45
Frame for flying and ground stacking



- PMA-DSL
stand



- COV-DSL45
Rain Cover

- Dimension (W×H×D):
430x60x580mm

- Dimension (W×H×D):
265x102x150mm

SPECIFICATION

Type	Support hanging installation Passive Subwoofer
Power	500W
Frequency Response(-10dB)	45Hz-300Hz
Maximum Calculated SPL/1M(Continuous/Peak)	121dB/127dB
LF Driver	1x15" driver, 4.0" voice coil
Impedance	8Ω
Crossover Mode	External (active) crossover
Crossover point	/
Input Connectors	Speakon 4Pin
Cabinet	
Cabinet Material	CNC made of excellent wood
Coating	Durable Polyurea Coating
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Grille	
Grille	Iron mesh
Handles	
Handles	2 side
Pole Mount	
Pole Mount	M20 formed base, φ35mm
Speaker Dimension(W×H×D)	426×470×570mm
Carton Dimensions (W×H×D)	512×565×657mm
Net Weight	32.0kg
Shipping Weight	35.0kg