
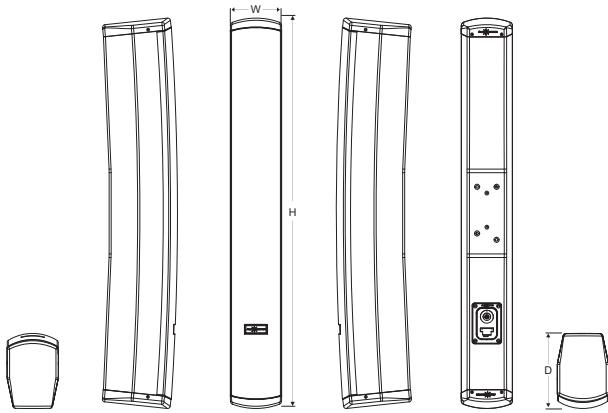


T83

T83 passive Hi Z and Low Z linear source column speaker is built with 8 pcs 3" neodymium drivers. The drivers are arranged by elaborate calculation and Phycal™ physical calibration technology, which makes T83 with wider near-field horizontal and vertical coverage than the normal column speaker, to meet various demands.

T83 is equipped with wall mount brackets to adjust the angle horizontally and vertically. T83 is inbuilt with voltage and impedance output switch tap, which makes T83 with more applications.



Dimension(W×H×D): 121x918x191mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



- **WM05-BL/WM05-W Wall Mount Bracket** (vertically installed, able to adjust horizontally and vertically)

- Dimension (W×H×D): 86x85x150mm



SPECIFICATION

| | |
|---|---|
| Type | Hi Z and Low Z Linear Source Column Speaker |
| Power | 240W |
| 70V/100V Power | 70V:120W/60W/30W/15W 100V:120W/60W/30W |
| Frequency Response | 110Hz-20kHz |
| Horizontal Coverage | 120° |
| Vertical Coverage | 40° |
| Maximum Calculated SPL/1M (Continuous/Peak) | 124dB/130dB |
| HF Drive | / |
| LF Drive | 8x3" Full frequency |
| Rated Impedance | 4Ω |
| Crossover Mode | / |
| Input Connectors | Euroblock |
| Cabinet | |
| Cabinet Material | Wood+Plastic |
| Coating | Durable Polyurea Coating |
| Cabinet Color | Black |
| Grille | Iron mesh |
| Speaker Dimension(W×H×D) | 121×918×191mm |
| Carton Dimension(W×H×D) | 1069×185x445mm |
| Net Weight | 7.0kg |
| Shipping Weight | 17.0kg(2pcs) |