
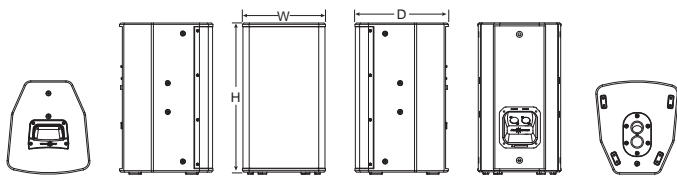



## GT508P

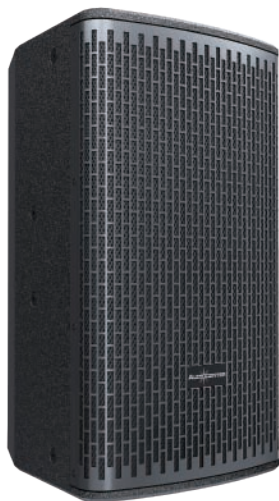

Dimension(WxHxD):245x447x320mm

### Specification

Type	Passive full range loudspeaker
Rated power(AES)	150W
Frequency Response(-10dB)	65Hz-20kHz
Horizontal Coverage	90°/60°
Vertical Coverage	60°/90°
Maximum Calculated SPL/1M(Continuous/Peak)	119dB/125dB
HF	1.75" voice coil, 1.0" exit
LF	8" driver, 2.0" voice coil
Impedance	8Ω
Crossover Mode	Passive
Crossover Point	1.5kHz
Input Connectors	Speakon 4Pin
<b>CABINET</b>	
Cabinet Material	CNC machined plywood
Coating	Durable Polyurea Coating
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Grille	Iron mesh
Handles	1 top
Monitor Angle	Symmetrical 45° monitoring Angle
Hanging Hardwares	M8 screw
Pole Mount	Base hole Φ35mm, 0° or 10° options
Speaker Dimension (WxHxD)	245x447x320mm
Carton Dimension (WxHxD)	336x531x410mm
Net Weight	11.0 kg
Shipping Weight	13.0 kg

### Product Profile

GT508P features a built-in passive crossover. This loudspeaker can be used in multimedia function halls, museums, houses of worship, shopping malls and other fixed installations.

The cabinet is made of high-quality wood, with an innovative and compact multi-purpose symmetrical cabinet structure CNC machined. This provides clear and powerful perfect sound quality. The base mounting holes are available in 0° or 10° options. According to different installation locations and methods, the cabinet can meet different sound reinforcement installation environments.

### Product Features

- Customized ProDriver
- Smart Crossover Design to ensure zero consumption even in very high dynamic output
- Unique Driver Protection Circuit
- DMF Composite Material Horn Design
- 90 ° rotatable HF horn
- Durable Polyurea Coating
- Double Pole Mount
- Optimized and compact cabinet structure design

### Suggested Application



Multi-functional meeting room



House of worship



Museum



Lecture



Meeting room




DJ





Bar




## Frequency Response Graphs

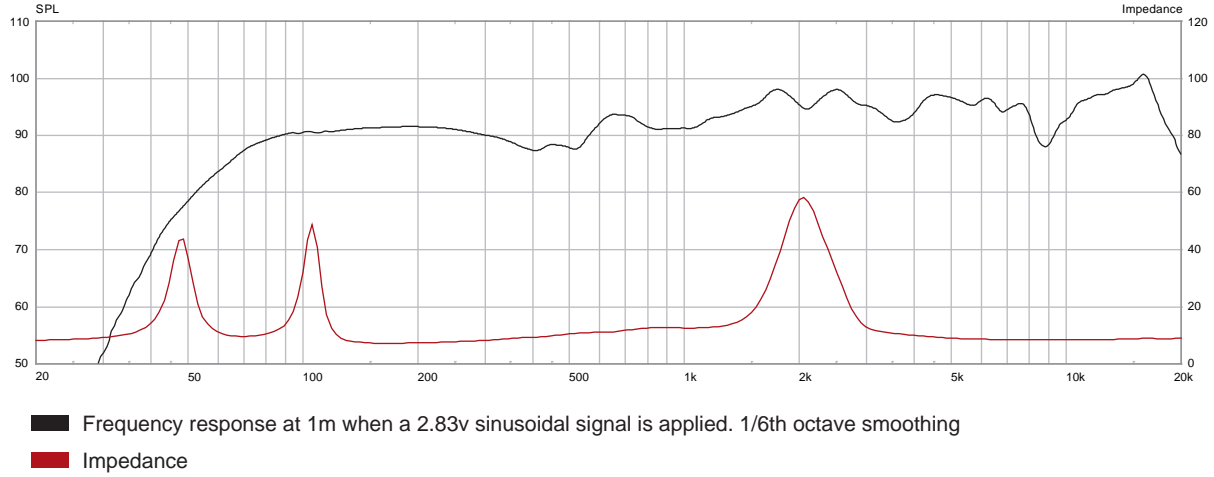


## Normalized Isobar Plot

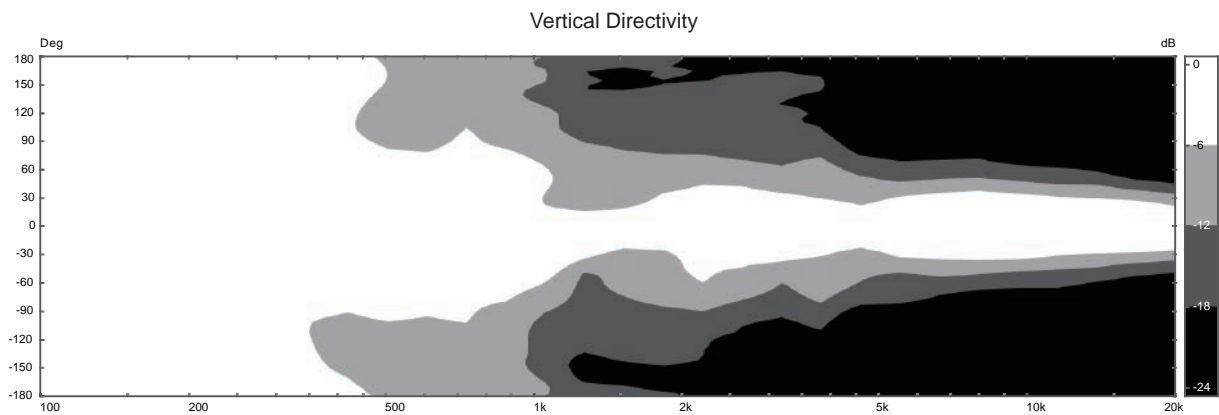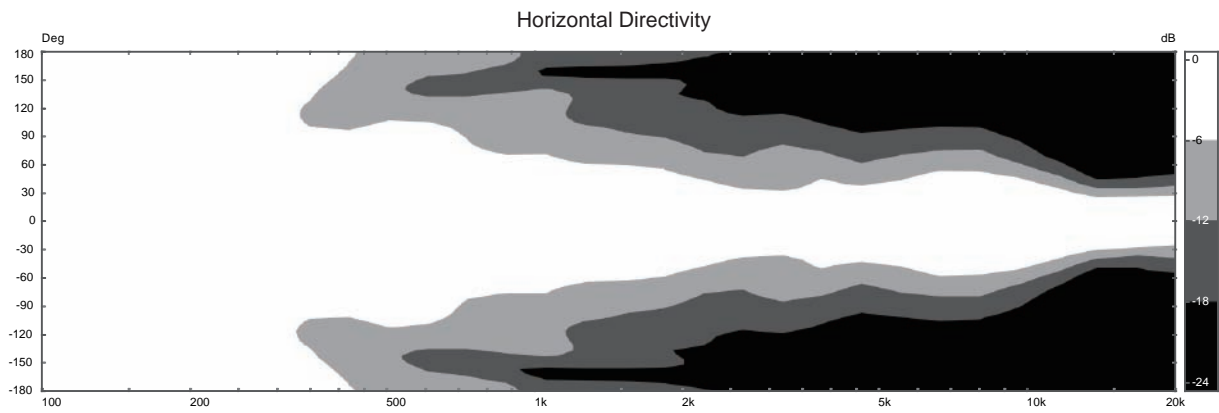

## Accessories




Horizontal U bracket  
Bearing 60KG



Cover



Pole bar  
Bearing 50KG



Flightcase  
For 2 cabinets,  
with 100mm wheels

## Installations

