



GT515P







Dimension(WxHxD):421x696x416mm

Specification

Type Passive full range loudspeaker

Rated power(AES) 400W
Frequency Response(-10dB) 40Hz-20kHz
Horizontal Coverage 90°/60°
Vertical Coverage 60°/90°
Maximum Calculated 130dB/136dB

SPL/1M(Continuous/Peak)

HF 1.75" voice coil, 1.0" exit LF 15" driver, 3.0" voice coil

 $\begin{array}{lll} \text{Impedance} & 8\Omega \\ \text{Crossover Mode} & \text{Passive} \\ \text{Crossover Point} & 1.2 \text{kHz} \\ \text{Input Connectors} & \text{Speakon 4Pin} \end{array}$

CABINET

Cabinet Material

Coating

Cabinet Color

Contact

Audiocenter for customization

Grille Iron mesh Handles 2 side

Monitor Angle Symmetrical 45° monitoring Angle

Hanging Hardwares M8 screw

Pole Mount Base hole Φ35mm, 0° or 10° options

Speaker Dimension (WxHxD) 421x696x416mm Carton Dimension (WxHxD) 516x785x516mm

Net Weight 22.0 kg Shipping Weight 26.0 kg

Product Profile

GT515P features a buit-in passive crossover. This loudspeaker can be used in multimedia function halls, museums, houses of worship, shopping malls and other fixed installations.

The cabinet is made of high-quality wood, with an innovative and compact multi-purpose symmetrical cabinet structure CNC machined. This provides clear and powerful perfect sound quality. The base mounting holes are available in 0° or 10° options. According to different installation locations and methods, the cabinet can meet different sound reinforcement installation environments.

Product Features

- Customized ProDriver
- Smart Crossover Design to ensure zero consumption even in very high dynamic output
- Unique Driver Protection Circuit
- DMF Composite Material Horn Design
- 90 ° rotatable HF horn
- Durable Polyurea Coating
- Double Pole Mount
- Optimized and compact cabinet structure design

Suggested Application



Multi-functional meeting room



House of worship



Museum



Lecture



Meeting room



Stage Monitor



Bar




r

DJ




Frequency Response Graphs

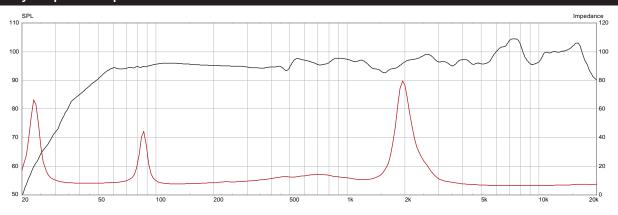


Frequency response at 1m when a 2.83v sinusoidal signal is applied. 1/6th octave smoothing

Impedance

Normalized Isobar Plot

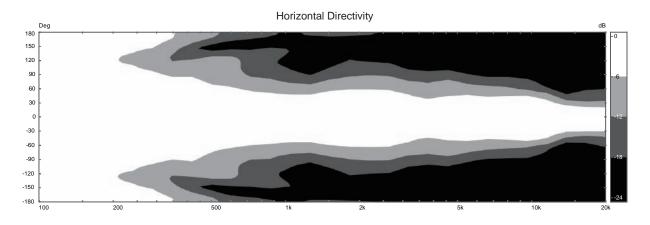

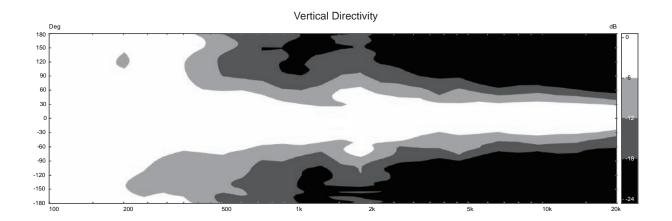



Accessories









Horizontal U bracket Bearing 60KG

Cover

Pole bar Bearing 50KG

Flightcase For 2 cabinets, with 100mm wheels

Installations







