


DS12

DS12 is a point-source loudspeaker with a passive crossover. Housed in a high-grade multi-ply birch enclosure, its symmetrical, compact design delivers true multi-purpose flexibility. A bottom-mounted rigging insert offers selectable 0° or 10° angles, allowing the cabinet to be flown, wall-mounted, or pole-mounted with equal ease—seamlessly adapting to any sound reinforcement scenario.

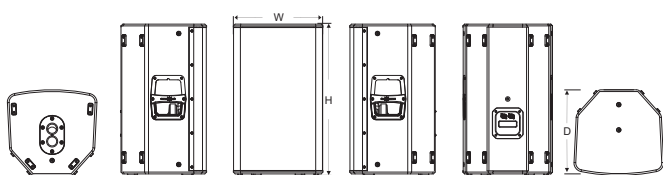


Dimension(W×H×D): 355x599x349mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- DMF Composite Material Horn Design
- Smart Crossover Design
- Rotatable Horn
- Unique Driver Protection Circuit
- Durable Polyurea Coating


ACCESSORIES



- WM-DS12-BL/W
Horizontal U bracket
- Dimension (W×H×D):
604x62x235mm



- COV-12
Rain Cover



SPECIFICATION

Type	Passive full range loudspeaker
Rated power(AES)	400W
Frequency Response(-10dB)	42Hz-20kHz
Horizontal Coverage	90°/60°
Vertical Coverage	60°/90°
Max SPL(Continuous/Peak)	128dB/134dB
HF	1.75" voice coil, 1.0" exit
LF	12" driver, 3.0" voice coil
Impedance	8Ω(+1,-1)
Crossover Mode	Passive
Crossover Point	1.2kHz
Input Connectors	Speakon 4Pin
CABINET	
Cabinet Material	CNC machined plywood
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black is the default color.
Grille	Iron mesh
Handles	2 side
Monitor Angle	Symmetrical 45° monitoring Angle
Hanging Hardwares	M8 screw
Pole Mount	Base hole Φ35mm, 0° or 10° optional
Speaker Dimension (W×H×D)	355x599x349mm
Carton Dimension (W×H×D)	446x688x446mm
Net Weight	19.0kg
Shipping Weight	22.0kg