
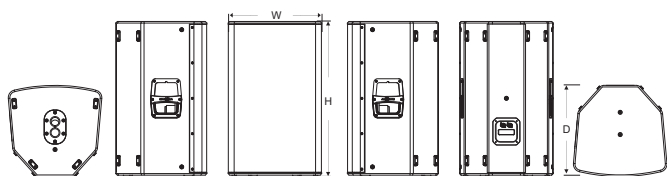


## DS15

DS15 is a point-source loudspeaker with a passive crossover. Housed in a high-grade multi-ply birch enclosure, its symmetrical, compact design delivers true multi-purpose flexibility. A bottom-mounted rigging insert offers selectable 0° or 10° angles, allowing the cabinet to be flown, wall-mounted, or pole-mounted with equal ease-seamlessly adapting to any sound reinforcement scenario.




Dimension(W×H×D): 421x696x416mm


### FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- DMF Composite Material Horn Design
- Smart Crossover Design
- Rotatable Horn
- Unique Driver Protection Circuit
- Durable Polyurea Coating

### ACCESSORIES



- WM-DS15-BL/W  
Horizontal U bracket
- Dimension (W×H×D):  
701x62x297mm



- COV-15  
Rain Cover

### SPECIFICATION

|                           |                                        |
|---------------------------|----------------------------------------|
| Type                      | Passive full range loudspeaker         |
| Rated power(AES)          | 400W                                   |
| Frequency Response(-10dB) | 40Hz-20kHz                             |
| Horizontal Coverage       | 90°/60°                                |
| Vertical Coverage         | 60°/90°                                |
| Max SPL(Continuous/Peak)  | 130dB/136dB                            |
| HF                        | 1.75" voice coil, 1.0" exit            |
| LF                        | 15" driver, 3.0" voice coil            |
| Impedance                 | 8Ω(+1,-1)                              |
| Crossover Mode            | Passive                                |
| Crossover Point           | 1.2kHz                                 |
| Input Connectors          | Speakon 4Pin                           |
| <b>CABINET</b>            |                                        |
| Cabinet Material          | CNC machined plywood                   |
| Coating                   | Durable Polyurea Coating               |
| Temperature range         | -20℃~+50℃                              |
| Cabinet Color             | Black is the default color.            |
| Grille                    | Iron mesh                              |
| Handles                   | 2 side                                 |
| Monitor Angle             | Symmetrical 45° monitoring Angle       |
| Hanging Hardwares         | M8 screw                               |
| Pole Mount                | Base hole Φ35mm,<br>0° or 10° optional |
| Speaker Dimension (W×H×D) | 421x696x416mm                          |
| Carton Dimension (W×H×D)  | 516x785x516mm                          |
| Net Weight                | 22.0kg                                 |
| Shipping Weight           | 26.0kg                                 |