
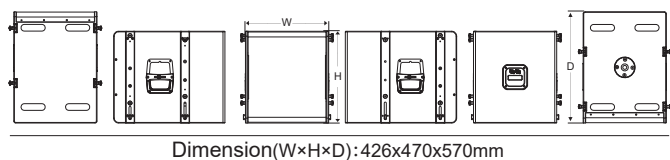


DSL115S

DSL115S is single 15" flyable passive subwoofer. It's suitable for multi-functional hall, ball room, house of worship, commercial space, etc.

DSL115S uses customized 15" LF drivers with 4" voice coil. Optimized phase structure makes DSL115S with extremely high SPL and supreme sound quality and performance.


With tongue and groove CNC made cabinet with excellent wood, DSL115S is resonance free.




FEATURES

- Waterproof Rating IP54
- Maximum SPL 127dB
- Customized driver
- The innovative ETE™ waveguide technology can ensure excellent frequency response, to achieve very smooth transitions between HF and LF, which provides precise horizontal coverage and ensures clear and balanced sound for the system.
- Optimized, compact and light weight cabinet design for easy usage
- Durable Polyurea Coating
- Comprehensive accessories for different applications


ACCESSORIES



- FF-DSL45/DSL115S Frame for flying and ground stacking



- Adjustable Bracket (2°, 6°, 10°)



- COV-DSL45/DSL115S Rain Cover

- Dimension (W×H×D): 430x60x580mm

- Dimension (W×H×D): 260x110x174mm

SPECIFICATION

Type	Support hanging installation Passive Subwoofer
Power	500W
Frequency Response(-10dB)	45Hz-300Hz
Maximum Calculated SPL/1M(Continuous/Peak)	121dB/127dB
LF Driver	1x15" driver, 4.0" voice coil
Impedance	8Ω(+2,-2)
Crossover Mode	External (active) crossover
Crossover point	/
Input Connectors	Speakon 4Pin
Cabinet	
Cabinet Material	CNC made of excellent wood
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black is the default color
Grille	Iron mesh
Handles	2 side
Pole Mount	M20 base Φ35mm
Speaker Dimension(W×H×D)	426×470×570mm
Carton Dimensions (W×H×D)	512×565×657mm
Net Weight	32.0kg
Shipping Weight	35.0kg