


T43

T43 passive Hi Z and Low Z linear source column speaker is built with 4 pcs 3" neodymium drivers. The drivers are arranged by elaborate calculation and Phycal™ physical calibration technology, which makes T43 with wider near-field horizontal and vertical coverage than the normal column speaker, to meet various demands.

T43 is equipped with wall mount brackets to adjust the angle horizontally and vertically. T43 is built-in with voltage and impedance output switch tap, which makes T43 with more applications.

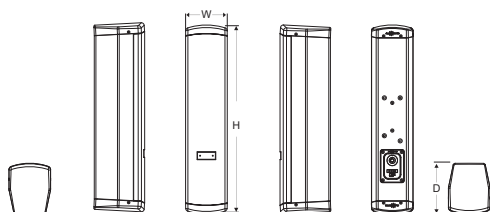

Dimension(W×H×D): 121x549x146mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



- WM05-BL/WM05-W
Wall Mount Bracket
(Able to adjust horizontally and vertically)

- Dimension (W×H×D):
86x85x150mm



SPECIFICATION

Type	Hi Z and Low Z Linear Source Column Speaker
Power	120W
70V/100V Power	70V:60W/30W/15W/7.5W 100V:60W/30W/15W
Frequency Response	110Hz-20kHz
Horizontal Coverage	120°
Vertical Coverage	40°
Maximum Calculated SPL/1M (Continuous/Peak)	121dB/127dB
HF Drive	/
LF Drive	4x3" Full frequency
Rated Impedance	8Ω(+1,-1)
Crossover Mode	/
Input Connectors	Euroblock
Cabinet	
Cabinet Material	Wood+Plastic
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black
Grille	Iron mesh
Speaker Dimension(W×H×D)	121×549×146mm
Carton Dimension(W×H×D)	730×235×210mm
Net Weight	3.6kg
Shipping Weight	9.5kg(2pcs)