


T65

T65 passive Hi Z and Low Z linear source column speaker is built with 6 pcs 5" LF drivers and 8 pcs dome tweeters. Compared to other same size column speakers, T65 is with more dynamic and smoother sound and wider frequency response. The drivers are arranged by elaborate calculation and Phycal™ physical calibration technology. The tweeters are designed with unique T-eye™, arranged as bow type array, which makes the vertical coverage of the T65 much wider, ensures the well balanced and even sound of near and far field.

T65 is equipped with wall mount brackets to adjust the angle horizontally and vertically. T65 is built-in with voltage and impedance output switch tap, which makes T65 with more applications.

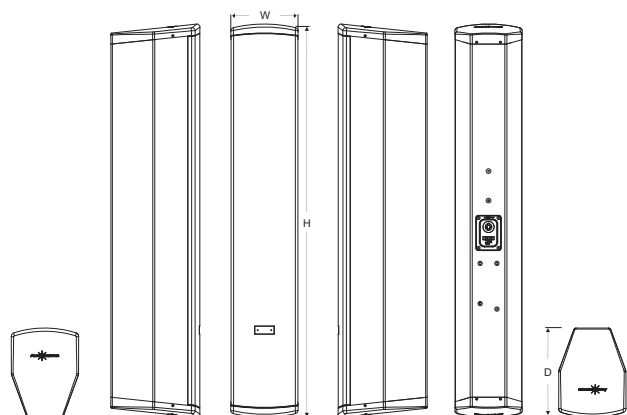

Dimension(W×H×D): 184x1077x255mm

FEATURES


- Waterproof Rating IP54
- Customized ProDriver
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



- WM05-BL/WM05-W
Wall Mount Bracket
(Able to adjust horizontally and vertically)

- Dimension (W×H×D):
86x85x150mm

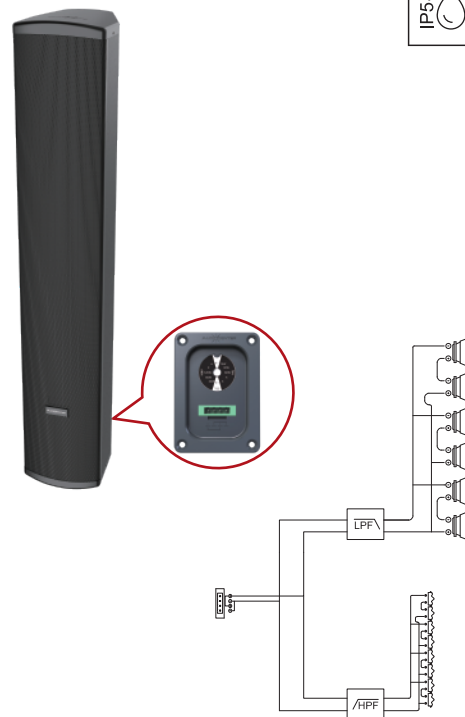

SPECIFICATION

Type	Hi Z and Low Z Linear Source Column Speaker
Power	480W
70V/100V Power	70V:120W/60W/30W/15W 100V:120W/60W/30W
Frequency Response	60Hz-20kHz
Horizontal Coverage	110°
Vertical Coverage	30°
Maximum Calculated SPL/1M (Continuous/Peak)	129dB/135dB
HF Drive	8x1"
LF Drive	6x5"
Rated Impedance	4Ω(+1,-1)
Crossover Mode	Passive Crossover
Input Connectors	Euroblock
Cabinet	
Cabinet Material	Wood+Plastic
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black
Grille	Iron mesh
Speaker Dimension(W×H×D)	184×1077×255mm
Carton Dimension(W×H×D)	1255×340×475mm
Net Weight	15.0kg
Shipping Weight	33.0kg(2pcs)