


T8

T8 adopts unique T-eye™ design, using 4 pcs dome tweeters, and the array layout is assembled in the center front of the speaker, which makes the speaker with wider frequency response, larger near-field coverage and smoother sound.

With modular design concept, T8 can be used in single pc or multiple pcs as line array to meet different demands. The angle of the fly bar can be adjusted 0°, 2°, 4°, 6°, 8°, 10°, 12° according to different venues and different applications. Single pc can be mounted by wall mount bracket, with the mounting degree to be adjusted vertically. T8 is with molded industrial design cabinet side cover, to work as handle and hide the pins.

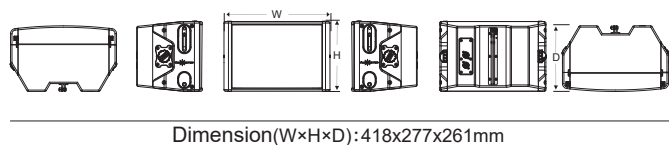

Dimension(W×H×D): 418x277x261mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



• WM-T8
Wall Mount Bracket

• Dimension (W×H×D):
371x60x176mm

• FB-T8
Hanging Bracket

• Dimension (W×H×D):
383x48x469mm

• LAW-T8
Wall Mount Bracket

• Dimension (W×H×D):
383x160x610mm



SPECIFICATION

Type	Point Source / Line Array Loudspeakers
Power	260W
Frequency Response(-10dB)	65Hz-20kHz
Horizontal Coverage	110°
Vertical Coverage	60°
Maximum Calculated SPL/1M (Continuous/Peak)	122dB/128dB
HF Drive	4x1" Driver
LF Drive	8" Driver
Rated Impedance	8Ω(+1,-1)
Crossover Mode	Passive Crossover
Input Connectors	Speakon 4Pin
Cabinet	
Cabinet Material	Wood+Plastic
Adjusted Angles	0°, 2°, 4°, 6°, 8°, 10°, 12°
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black
Grille	Iron mesh
Pole Mount	/
Speaker Dimension(W×H×D)	418×277×261mm
Carton Dimension(W×H×D)	490×340×350mm
Net Weight	8.0kg
Shipping Weight	8.5kg