
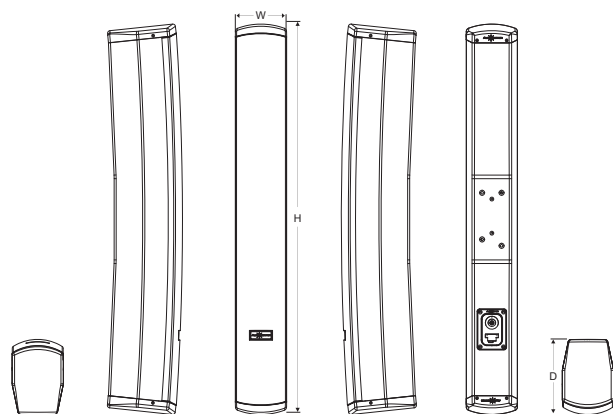


T83

T83 passive Hi Z and Low Z linear source column speaker is built with 8 pcs 3" neodymium drivers. The drivers are arranged by elaborate calculation and Phycal™ physical calibration technology, which makes T83 with wider near-field horizontal and vertical coverage than the normal column speaker, to meet various demands.

T83 is equipped with wall mount brackets to adjust the angle horizontally and vertically. T83 is inbuilt with voltage and impedance output switch tap, which makes T83 with more applications.



Dimension(W×H×D): 121x918x191mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



- WM05-BL/WM05-W
Wall Mount Bracket
(Able to adjust horizontally and vertically)

- Dimension (W×H×D):
86x85x150mm



SPECIFICATION

Type	Hi Z and Low Z Linear Source Column Speaker
Power	240W
70V/100V Power	70V:120W/60W/30W/15W 100V:120W/60W/30W
Frequency Response	110Hz-20kHz
Horizontal Coverage	120°
Vertical Coverage	40°
Maximum Calculated SPL/1M (Continuous/Peak)	124dB/130dB
HF Drive	/
LF Drive	8x3" Full frequency
Rated Impedance	4Ω(+1,-1)
Crossover Mode	/
Input Connectors	Euroblock
Cabinet	
Cabinet Material	Wood+Plastic
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black
Grille	Iron mesh
Speaker Dimension(W×H×D)	121×918×191mm
Carton Dimension(W×H×D)	1069×185×445mm
Net Weight	7.0kg
Shipping Weight	17.0kg(2pcs)