


Butterfly 4pro

Butterfly 4pro consists of 1 pc 4-inch LF driver and 2 pcs soft dome tweeters. The HF have an exclusive T-EYE™ design, and the array layout is assembled in the center front of the speaker. The speaker has a wider frequency response and large near-field coverage, and the sound is especially defined and delicate.

Butterfly 4pro also have a modular design concept, which can be used individually or in combination with multiple speakers. It has good scalability and can flexibly adapt to various environments and applications.

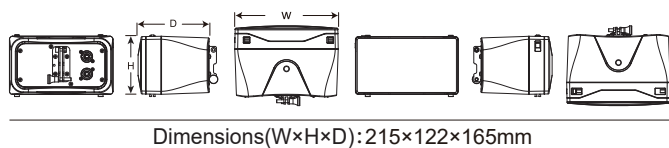

FEATURES

- Customized ProDriver
- Smart Crossover Design
- Durable ABS cabinet structure
- Unique Driver Protection Circuit
- T-EYE™ Treble Design
- Extremely Simple Installation
- Flexible and Multiple Applications

ACCESSORIES



SPECIFICATION

Type	Point Source / Line Array Loudspeakers
Power (RMS)	60W
Power (CV)	/
Frequency Response(-10dB)	100Hz-20kHz
Horizontal Coverage	100°
Vertical Coverage	20°
Maximum Calculated SPL/1M (Continuous/Peak)	111dB/117dB
HF Drive	2x1" Driver
LF Drive	4" Driver
Rated Impedance	16Ω(+1,-1)
Crossover Mode	Passive Crossover
Input Connectors	Speakon 4Pin
Cabinet	
Cabinet Material	ABS plastic material
Temperature range	-20℃~+50℃
Adjusted Angles	0°,4°
Cabinet Color	Metal gray
Grille	Iron mesh
Grille Color	Can be customized
Pole Mount	M10
Support Hole	M10 Support Hole
Speaker Dimension(W×H×D)	215×122×165mm
Carton Dimension(W×H×D)	253×160×247mm
Net Weight	2.3kg
Shipping Weight	2.7kg