


DS26

DS26 is a point-source loudspeaker with a passive crossover. Housed in a high-grade multi-ply birch enclosure, its symmetrical, compact design delivers true multi-purpose flexibility. A bottom-mounted rigging insert allowing the cabinet to be flown, wall-mounted, or pole-mounted with equal ease-seamlessly adapting to any sound reinforcement scenario.



Dimension(W×H×D):200x555x215mm

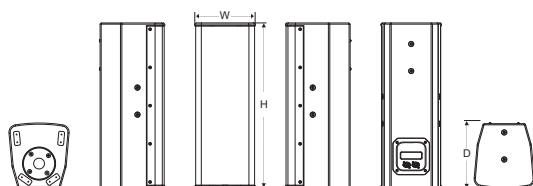


FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- DMF Composite Material Horn Design
- Smart Crossover Design
- Rotatable Horn
- Unique Driver Protection Circuit
- Durable Polyurea Coating

ACCESSORIES



- WM-DS68
Wall Mount Bracket
- Dimension (WxHxD):
65x113x77mm



- COV-26
Rain Cover

SPECIFICATION

Type	Passive full range loudspeaker
Rated power(AES)	200W
Frequency Response(-10dB)	60Hz-20kHz
Horizontal Coverage	70° /50°
Vertical Coverage	50° /70°
Max SPL(Continuous/Peak)	119dB/125dB
HF	1.0" voice coil, 1.0" exit
LF	2x6" driver, 1.3" voice coil
Impedance	4Ω(+1,-1)
Crossover Mode	Passive
Crossover Point	1.5kHz
Input Connectors	Speakon 4Pin
CABINET	
Cabinet Material	CNC machined plywood
Coating	Durable Polyurea Coating
Cabinet Color	Black is the default color.
Grille	Iron mesh
Handles	/
Monitor Angle	/
Hanging Hardwares	M8 screw
Pole Mount	Base hole Φ35mm
Speaker Dimension (W×H×D)	200x555x215mm
Carton Dimension (W×H×D)	291x641x307mm
Net Weight	10.0kg
Shipping Weight	12.0kg