


DS10

DS10 is a point-source loudspeaker with a passive crossover. Housed in a high-grade multi-ply birch enclosure, its symmetrical, compact design delivers true multi-purpose flexibility. A bottom-mounted rigging insert offers selectable 0° or 10° angles, allowing the cabinet to be flown, wall-mounted, or pole-mounted with equal ease-seamlessly adapting to any sound reinforcement scenario.

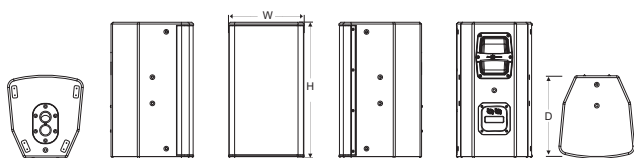


Dimension(W×H×D):288x526x325mm

FEATURES

- Waterproof Rating IP54
- Customized ProDriver
- DMF Composite Material Horn Design
- Smart Crossover Design
- Rotatable Horn
- Unique Driver Protection Circuit
- Durable Polyurea Coating


ACCESSORIES



- WM-DS10-BL/W
Horizontal U bracket
- Dimension (W×H×D):
528x55x206mm



- COV-10
Rain Cover



SPECIFICATION

Type	Passive full range loudspeaker
Rated power(AES)	250W
Frequency Response(-10dB)	55Hz-20kHz
Horizontal Coverage	90°/60°
Vertical Coverage	60°/90°
Max SPL(Continuous/Peak)	124dB/130dB
HF	1.75" voice coil, 1.0" exit
LF	10" driver, 2.5" voice coil
Impedance	8Ω(+1,-1)
Crossover Mode	Passive
Crossover Point	1.4kHz
Input Connectors	Speakon 4Pin
CABINET	
Cabinet Material	CNC machined plywood
Coating	Durable Polyurea Coating
Temperature range	-20℃~+50℃
Cabinet Color	Black is the default color.
Grille	Iron mesh
Handles	1 back
Monitor Angle	/
Hanging Hardwares	M8 screw
Pole Mount	Base hole Φ35mm, 0° or 10° optional
Speaker Dimension (W×H×D)	288x526x325mm
Carton Dimension (W×H×D)	383x610x415mm
Net Weight	13.0kg
Shipping Weight	16.0kg